

LCT-FG

TAMIGI

FrigoCarbonatore «Sottolavello»

Water Cooler & Carbonating system «Undersink»



POSSIBILITÀ DI **PERSONALIZZARE IL LOGO FRONTALE CON TAGLIO LASER**

POSSIBILITY OF **PERSONALIZING THE FRONT LOGO WITH LASER CUTTING**




GOCCIA RETROILLUMINATA A LED
DROP WITH BACKLIGHT (LED)



**EROGATORE D'ACQUA MICROFILTRATA
FREDDA, FREDDA FRIZZANTE E
TEMPERATURA AMBIENTE**

*MICROFILTERED WATER DISPENSER
FOR COOL STILL, COOL SPARKLING AND
ROOM-TEMPERATURE WATER*

LCT-FG

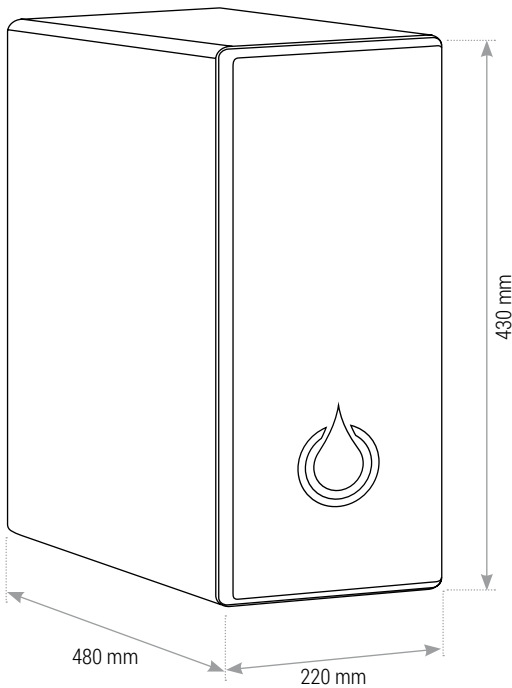

PROCESSO DI FILTRAZIONE

INGRESSO ACQUA ACQUEDOTTO

1° STADIO

Filtro dei sedimenti in polipropilene ad uso alimentare. Riduce limo e sedimenti.

2° STADIO

Filtro con carbone granulare di origine minerale addizionato con argento. Riduce odori, sapori e rilascia benefici ioni d'argento, con funzioni antibatteriche.

USCITA ACQUA RUBINETTO

FILTRATION PROCESS

INCOMING WATER WATER MAIN

1st STAGE

Sediment filter in polypropylene 5 micron for alimentary use. Reduces silt and sediment.

2nd STAGE

Granular Activated Carbon Filter of mineral origin with the addition of silver. Reduces odors, flavors and releases the benefits of silver ions.

OUTGOING WATER FAUCET

CARATTERISTICHE TECNICHE



Alimentazione	220 V 50 Hz
Gas	R134A a norma CFC
Compressore	Hp ermetico con sistema di refrigerazione gas R134 a liquido
Raffreddamento	Refrigerazione acqua erogata banco di ghiaccio LT 6
Pompa	Pompa Booster 24 V
Dimensioni	220 x 430 x 480 mm (L-H-P)
Peso	15 kg

TECHNICAL FEATURES



Power supply	220V 50 Hz
Gas	R134A in accordance with CFC
Compressor	Hp hermetic with refrigeration system of gas R134 liquid
Cooling	Dispensed water cooling ice bank LT 6
Pump	Booster Pump 24 V
Dimensions	220 x 430 x 480 mm (W-H-D)
Weight	15 kg

ACCESSORI OPZIONALI

OPTIONAL ACCESSORIES



RUBINETTO - FAUCET
3 acque
3 water



RUBINETTO - FAUCET
Monocomando - a 5 vie - canna bassa
Single-control - Five-way mixer tap - low cane



RUBINETTO - FAUCET
Monocomando - a 5 vie - canna alta
Single-control - Five-way mixer tap - high cane

ACCESSORI IN DOTAZIONE

SUPPLIED ACCESSORIES



Kit di installazione
Installation Kit

ACCESSORI NECESSARI

ACCESSORIES REQUIRED



Riduttore per bombole ricaricabili con manometro di bassa pressione assiale
Reducer for rechargeable gas cylinders with axial low pressure gauge



BOMBOLE 1-2-4 Kg
Ricaricabile
CO2 Gas cylinder
1-2-4 Kg Rechargeable



RUBINETTO - FAUCET

La Commercè ha scelto la qualità dei raccordi ad innesto rapido di
La Commercè has chosen the quality of John Guest push-in fittings

John Guest®