

LCT-MF01


GANGE

Sistemi di Microfiltrazione con sterilizzatore UVC Philips «Sottozoccolo»
Microfiltration Systems with Philips UVC sterilizer «Under baseboard»



PRODUZIONE ACQUA
WATER PRODUCTION

180 l/h

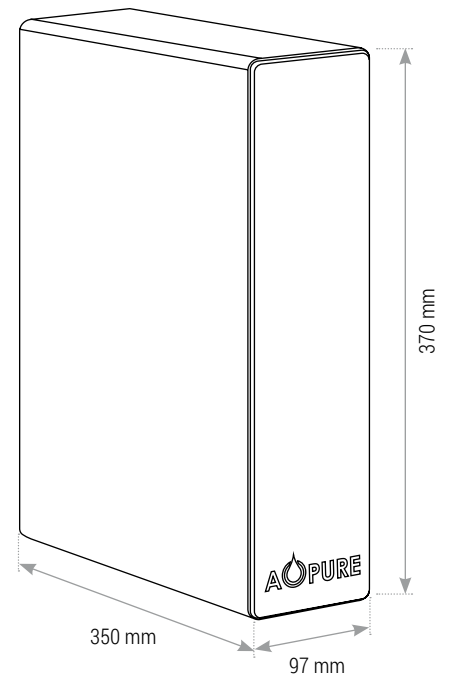

CARATTERISTICHE TECNICHE



1° stadio	filtro da 12" in-line per sedimenti PPF - 5 micron
2° stadio	filtro da 12" in-line carbon block - 5 micron
3° stadio	lampada UV da 11 W 1GPM la lampada UV funziona solo ad erogazione d'acqua in corso
Raccorderia	raccorderia DMFIT "certificata"
Componente	pressostato ed elettrovalvola in ingresso
Produzione	180 l/h
Componente	manometro
Contenitore	acciaio SP 10/10 colore nero
Peso	5 kg
Dimensioni	97 x 370 x 350 mm (L-H-P)
Centralina elettronica	- sensore anti-allagamento con blocco funzioni ed ingresso acqua

TECHNICAL FEATURES



1st stage	in-line sediment filter 12" PPF - 5 micron
2nd stage	carbon block filter 12" - 5 micron
3rd stage	UV lamp 11 W 1GPM the UV lamp only works with the water supply (in progress)
Fittings	fittings DMFIT "certified"
Component	pressure switch and solenoid valve
Capacity	180 l/h
Component	pressure gauge
Case	stainless SP 10/10 black colour
Weight	5 kg
Dimensions	97 x 370 x 350 mm (W-H-D)
Electronic control unit	- anti-flooding acoustic with block functions for incoming water

ACCESSORI IN DOTAZIONE

SUPPLIED ACCESSORIES



Kit di installazione
Installation Kit

La Commercè ha scelto la qualità dei raccordi ad innesto rapido di
La Commercè has chosen the quality of John Guest push-in fittings

John Guest